





ENVIRONMENT
AND CLIMATIC
SOLUTIONS
MATERIAL



X-RCAM+ R290 MED



R290

Double-flow heat pump with plate heat exchanger
For the treatment of hygienic fresh air in healthcare facilities



www.ett-hvac.com

CONTENTS

■ General description	3
■ Risk analysis	4
■ Safety and intervention zone.....	4
■ Unit description	5
■ Health focus	6
■ Operating principles	8
■ Detailed components of the unit	9
■ Main options	12
Technical features	
■ X-RCAM+ R290 MED 2-3000 / 2-4000	13
■ X-RCAM+ R290 MED 3-5000 / 3-6000	15
■ X-RCAM+ R290 MED 4-7000 / 4-8000 / 4-9000 / 4-10000	17
■ X-RCAM+ R290 MED 5-11000 / 5-12000 / 5-13000 / 5-14000 / 5-15000	19
Dimensions and connections	
■ X-RCAM+ R290 MED 2-3000 / 2-4000	14
■ X-RCAM+ R290 MED 3-5000 / 3-6000	16
■ X-RCAM+ R290 MED 4-7000 / 4-8000 / 4-9000 / 4-10000	18
■ X-RCAM+ R290 MED 5-11000 / 5-12000 / 5-13000 / 5-14000 / 5-15000	20
Air handling layouts	
■ Air handling layouts	21
■ TWIN regulation option	22
■ Multi-block option	22
Auxiliaries	
■ Hot water coils	23
■ Chilled water coils	24
Connections	
■ Hot water coil	25
Sound level	
■ Supply air/exhaust air	26
■ Fresh air intake/return air	27
Accessories for installation	
■ Accessories for installation : Feet	28

General description

The ETT packaged unit is delivered ready to operate. Its full aluminium structure (frame and casing), ensures an excellent corrosion protection (20-year anti-corrosion guarantee).

Aluminium facilitates the REFURBISHMENT of machines for a second life, unlike a steel structure.

Our technical choices have a major impact on the environment

• DECARBONATION:

ETT is committed to an ambitious approach to reducing greenhouse gas emissions:

- Reducing the energy consumption of our machines
- Fluid refrigerants with low GWP
- Energy monitoring & AI
- Adiabatic cooling
- Development of machine retrofits

• ALUMINIUM : PERFORMANCE AND DURABILITY!

- Lightweight: 3 times lighter than steel
- Corrosion resistant and long lifespan
- Thermal performance
- 100% recyclable indefinitely
- Facilitates the refurbishment of our machines



• ECO-DESIGN:

Our technologies are designed with sustainability in mind, reducing their environmental impact throughout their life cycle.

• LOW-POLLUTION MANUFACTURING PROCESS:

- Selective sorting: 80% recovery rate
- No paint or solvents

• END OF MACHINE LIFE:

In compliance with regulations, ETT is a member of the Ecologic eco-organisation for the end-of-life processing of machines, which are 98% recyclable.



• ETT CERTIFICATIONS

• **CSR assessment:** ECOVADIS Gold Medal for our CSR approach



• **ISO 14001 & ISO 9001 certification :** our Quality and Environmental Management System



• **Certificate of competence for handling refrigerants**

• **Membership of the UN Global Compact**

• **Qualiopi certification** for our training centre



ETT, a positive impact company, contributes to a more sustainable world through its range of products and services.



In addition, each unit is delivered

With a **certificate of conformity to EU standards** and complies with the following standards:

- Machinery Directive 2006/42/EC - Operator's safety
- Low Voltage Directive (LVD) 2014/35/EU - Electricity
- Electromagnetic Compatibility (EMC) Directive 2014/30/EU
- Regulation (EU) 2016/426 – Gas appliances
- Standard NF EN 60204 -1- Electrical appliances
- Standard EN 378-2 : 2017 – Safety and environmental requirements
- PED Directive 2014/68/EU (in accordance with Articles 2.10, 2.11, 3.4, 5a and 5d of Annex 1) - Pressure equipment
- EcoDesign regulations ErP UE 2281/2016

20-year guarantee
against corrosion
frame - casing



Risk analysis

The **Explosion Protection Document (DRPCE)** is a safety document that identifies, assesses, and controls risks when using flammable or combustible products (as is the case with R32 or R290 refrigerants).

The drafting of the **DRPCE** is required uniformly for all A2L to A3 fluids (according to NF EN 378 2017).

This is a mandatory document for companies where explosive atmospheres may form (presence of flammable gases, vapors, or dusts).

It aims to assess explosion risks, define ATEX zones, and implement prevention and protection measures.

This risk analysis must be conducted by the operator of the building where the machine is installed and provided at the time of commissioning.



Safety and intervention zone

Since propane is heavier than air, it is important to avoid any areas where gas could accumulate near the machine in the event of a leak.


Therefore, in the case of machines installed outdoors, particular attention must be paid to the positioning of the machines in relation to openings such as Skydomes and parapets.

In the case of machines installed indoors, it is recommended to duct the valve to the outside of the building to vent gases in case of leakage. It is also recommended to duct the recirculation fan from the technical compartment to the outside of the building.


Likewise, it is necessary to ensure the absence of air intakes, wall openings, drainage channels, and low points near the machine.

For each machine size, a safety zone must be maintained (indicated by the shaded area in the diagrams below), and this zone must be free of any external machine equipment.


SAFETY AND INTERVENTION ZONE DEPENDING ON THE TYPE OF MACHINE

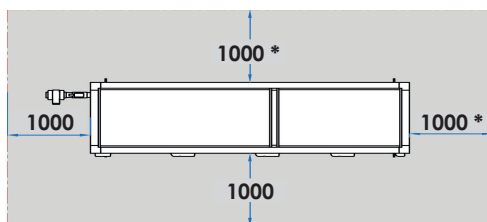


X-RCAM+ R290 MED T2

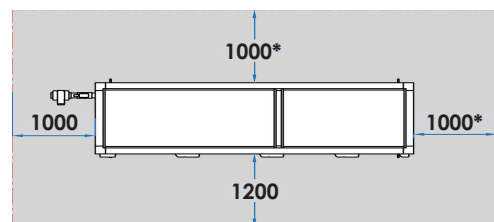

X-RCAM+ R290 MED T3

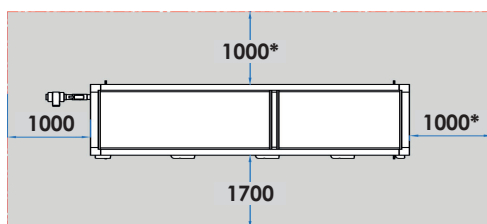

X-RCAM+ R290 MED T4

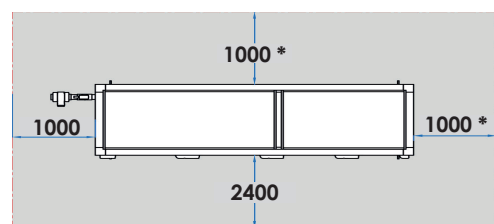

X-RCAM+ R290 MED T5

(* excluding machine against a wall)

Special case of work on the refrigeration circuit:

In this case, the technician must maintain a **5-meter** safety distance **all around** the machine (not shown in the diagrams).

During the intervention, it is essential to secure this expanded zone by preventing any ignition sources and checking that there is no possibility of gas leakage into the building (by closing openings and air intakes, in particular). If it is not possible to seal these openings, an analysis must be carried out to implement preventive measures such as a deflector or a safety system must be installed.

This analysis must be carried out as soon as the machine is installed.

Unit description

The **X-RCAM+ R290 MED** (Recovery Clean Air Management) is a dual-flow heat pump with dual energy recovery from exhaust air. It provides **hygienic fresh air at a neutral temperature**, as required by the Regulations for Public Access Buildings in accordance with the French Labour Code, and has been specially designed to meet the requirements of healthcare facilities: hospitals, clinics and nursing and care homes.

Regulation is based on the supply air temperature.

Thanks to the various innovations and materials used, the **X-RCAM+ R290 MED** combines performance, reliability and hygiene with environmental responsibility.

New generation PLC with display

- Controls for optimum operation
- New ETT Control Box touch display (optional)
- Ventilated electrical board separated from the technical compartment
- Basic phase controller


Connected components

- myETTvision 1-year subscription provided with no commitment
- 4G maintenance gateway



Fans

- Basic epoxy protection
- Analogue air flow controller (AFC), communicating, direct transmission, "EC" electronically commutated motor, optimum performance and low acoustic level

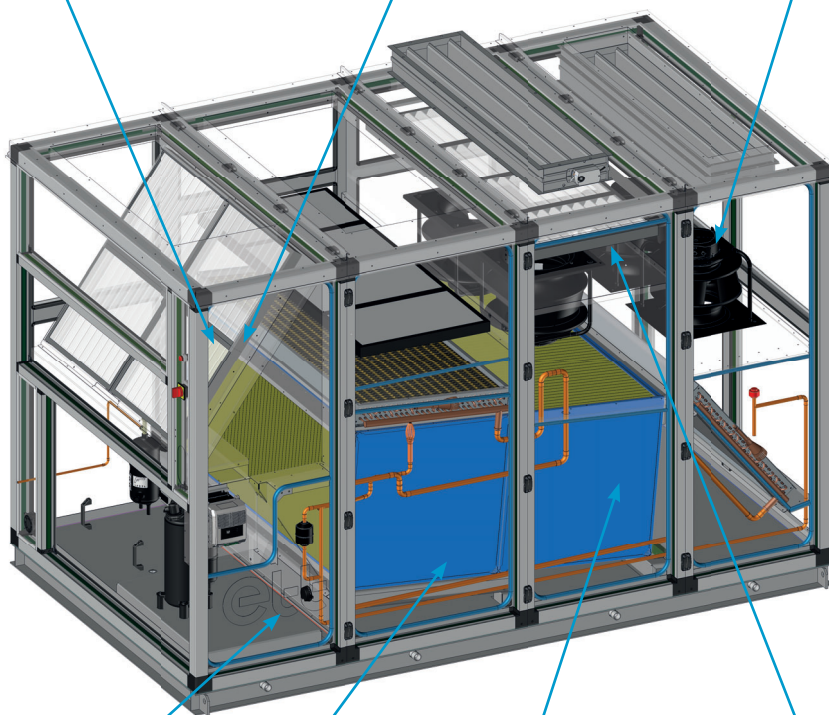

Leak detector

- With propane detector, safety chain and mixing fan from the technical compartment **NEW !**

Energy recovery

- Cross-flow plate heat exchanger
- Corrosion-resistant paint
- Efficiency greater than 73% in 100% fresh air mode (in accordance with EN308)
- Eurovent-certified heat exchanger

Eco-design filtration

- Low pressure drop.
- Analogue clogging controller.
- ISO ePM10 50% (M5) and standard ISO ePM1 50% (F7) on supply air
- ISO ePM10 50% (M5) on exhaust air.

Thermodynamic batteries

- New R290 refrigerant **with a low GWP (0.02)** **NEW !**
GWP = Global warming potential
- Enhanced heat exchangers for a lower refrigerant load **NEW !**
- Coils with vinyl-protected fins
- Electronic expansion valves

R290

Unit description

HEALTH FOCUS





Complies with the requirements of French standard NF S 90-351.

- ▶ Adjustment of fresh air or extract air flow rates to achieve the desired pressure level.
- ▶ Air filtration: ISO ePM10 50% (M5) and ISO ePM1 50% (F7) supplied as standard at supply air.
- ▶ Chequer-plate aluminium condensate drip tray with stainless-steel drain
- ▶ Air velocity across the evaporator coil: maximum 2.5 m/s
- ▶ Supply airstream maintained at positive pressure to prevent any return air from entering the fresh-air stream within the heat-recovery exchanger



Return air
Negative-pressure air stream

Fresh air
Positive-pressure air stream

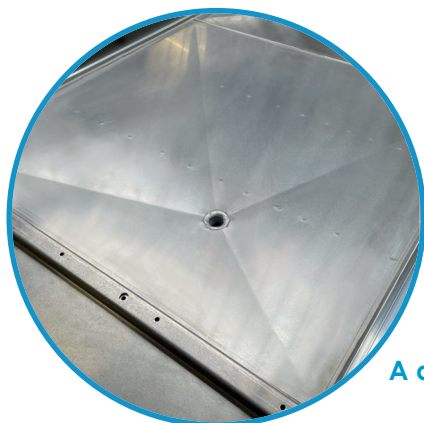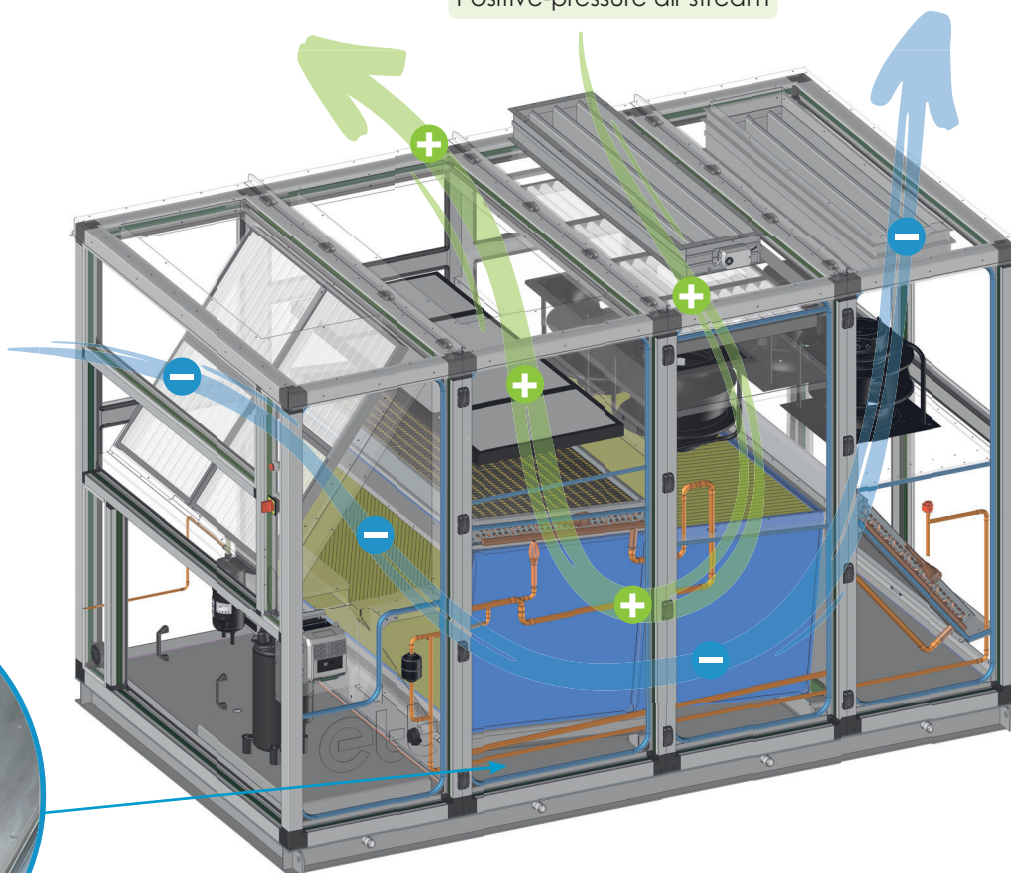

A diamond-point tray

Unit description

Reinforced insulation

- 50 mm thick glass wool classified M0/A2s1d0
- Integrated thermal bridge breaker

- Reinforced acoustic insulation with double skin and high-density glass wool



Seal

Airtightness level L1 (according to NF EN 1886) Hygienic quality VDI6022

100% recyclable aluminium

Aluminium frame and casing assembly

- New system with improved thermal performance, class T2TB2 (in accordance with NF EN 1886)
- Optimised tightness and thermal insulation.
- Compression locks
- Reduced weight, for new and refurbish projects.

20-year guarantee
against corrosion
frame - casing

Installation in a technical compartment

- Compact casing for wall mounting.
- Narrow machine width for easy door access during installation
- Multiblock delivery available as an option.
- Machine easily cleanable with integrated condensate tray.




*EN1886 performance level on ETT model housing tested and validated by the TUV Nord laboratory (2022)

NF EN 1886: 2008	ETT «Model Box» performance				
Mechanical distortion			D3	D2	D1
Case leak (overpressure +700Pa)			L3	L2	L1
Case leak (negative pressure -400Pa)			L3	L2	L1
Filter frame leak	M5	F6	F7	F8	F9
Transmittance	T5	T4	T3	T2	T1
Thermal bridge	TB5	TB4	TB3	TB2	TB1

Operating principles

Energy recovery from exhaust air in winter and summer is carried out via a plate heat exchanger (PHE). The setpoint temperature can be maintained thanks to this recovery and, to the heat pump reversible cycle if required.

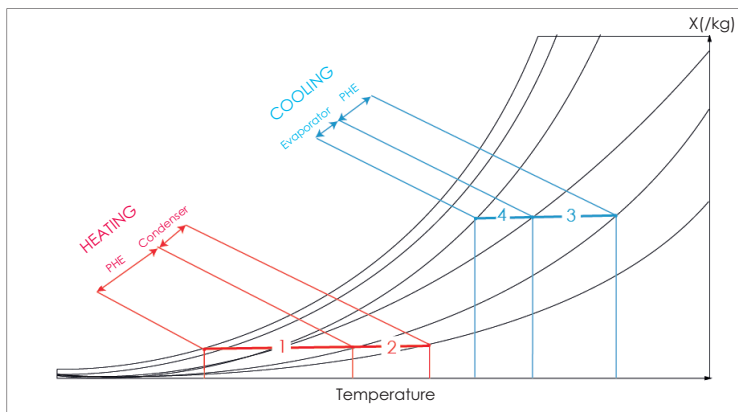


The machine operates as a reversible heat pump:

- > Source : exhaust air
- > Treated fluid: hygienic fresh air
- > With 100% fresh air - 100% exhaust air with supply air temperature control.


The following operating modes are available:

- > Heating mode: the exhaust air transfers its heat to the outside fresh air through the plate heat exchanger (minimum efficiency 70%) [1]. If required by the heating load, supplementary heating is provided by the variable-capacity refrigeration circuit condenser to optimally maintain the setpoint temperature [2].
- > Cooling mode: Heat from the fresh air is recovered and transferred to the exhaust air via a plate heat exchanger (minimum efficiency 70%) [3]. If necessary, the variable-capacity refrigeration circuit evaporator is engaged to precisely maintain the required setpoint [4].

Heating Mode :

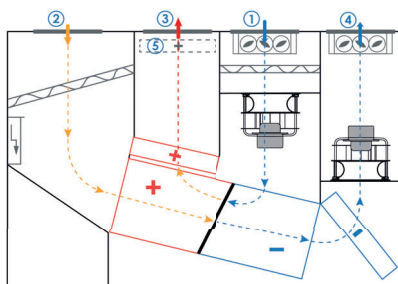


Cooling Mode :

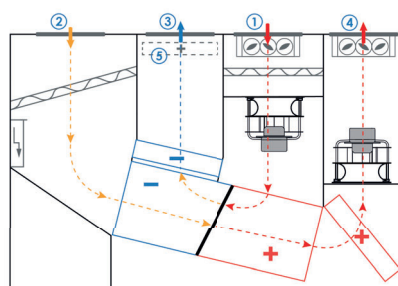

① Fresh air ② Return air ③ Supply air ④ Exhaust air ⑤ Auxiliary heating

Detailed components of the unit

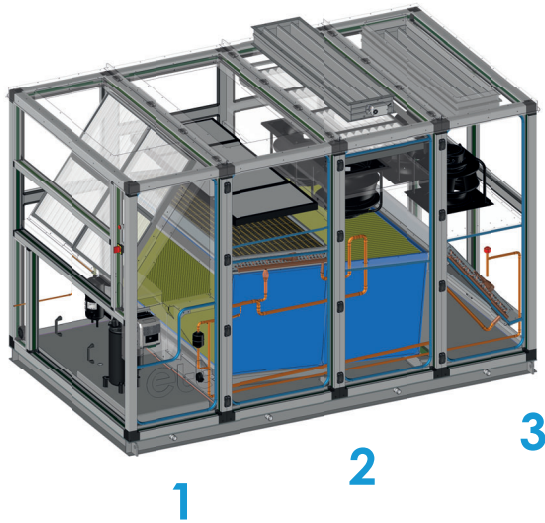

The ETT packaged unit comprises 3 different compartments:

- 1 A technical compartment housing the refrigeration components, the electrical board and the control devices.
- 2 A supply air compartment for fresh air renewal.
- 3 An extraction compartment for recovering and/or rejecting heat from the extracted air (depending on the operating mode).

Aluminium frame and casing :

- **Rigid** and lightweight packaged unit, with perfect weather resistance and a 20-year anti corrosion warranty on the entire casing.
- **Watertight floor** with drainage outlets around the unit, connected to rubber traps.
- **Full aluminium** casing AG3.
- **High-performance thermal and aeraulic casing: T2 & TB2 thermal class, L1 & F9 leakage level as per NF EN 1886.**
- A separate technical compartment that facilitates maintenance and control of the unit, enables measurements to be taken and settings to be fine-tuned during operation.
- **Access via oversized, removable** hinged doors. The panels are fitted **with compression locks**. The removable panels are sealed by compression on a flexible lip seal, ensuring a perfect sealing over time.
- **Double-skin internal sound and heat insulation** of the side walls using 50 mm thick glass wool classified M0/A2s1d0, protected by a 13/10 thick aluminium sheet for mechanical protection and ease of maintenance
- **Floor thermal and acoustic insulation** provided by 50 mm glass wool, M0/A2s1d0 with double-skin.
- **A separate technical compartment** that facilitates maintenance and control of the unit, enables measurements to be taken and settings to be fine-tuned during operation.
- **The extraction compartment** comprises a fresh-air intake damper with bird-proof grille and an exhaust damper. The dampers have extruded aluminium blades with low pressure drop due to the aircraft wing profile. The damper frame is made of aluminium.

Detailed components of the unit

Air handling assembly :

- **Energy-efficient filtration: 48 mm + 48 mm thick** at supply, easily removable, ISO ePM10 50% (M5) pleated media + ISO ePM1 50% (F7) efficiency, with filter fouling monitoring via regulator.
- **Energy-efficient filtration: 48 mm thick** at return, easily removable, ISO ePM10 50% (M5) efficiency in pleated media with fouling controlled by the regulator.
- **Last generation internal fans (High Energy Performance):**
 - ✓ **Direct transmission** (savings in maintenance, reliability and consumption).
 - ✓ **Fitted with a variable speed " EC "** electronically commutated motor combined with an Analogue Flow Controller - AFC (savings on commissioning).
 - ✓ Communicating, for real time operation adjustment.
 - ✓ With integrated Soft Starter to reduce starting current and enable soft starting (textile ducts).

Energy and thermodynamic assembly:

- **Refrigeration circuits** compliant with the European Pressure Equipment Directive (PED 2014/68/EU).
- **Variable-speed compressor** for optimized unit efficiency. Supply air temperature control via inverter drive.
- **Refrigerant R290.**
- **A plate heat exchanger**, with aluminium plates, with high recovery capacity and sized to optimise the heat pump's efficiency. The plate heat exchanger recovers heat from the extracted air and transfers it on the fresh air side to the second half of the plate heat exchanger. Heat transfer takes place without energy consumption. The plate heat exchanger will be protected by vinyl treatment on the plates and anti-corrosion paint on the frame.
- **Direct expansion heat exchangers**, with copper tubes and aluminium fins, with high heat exchange capacity optimised by a thermostatic expansion valve, selected for an air speed of less than 2.6 m/s to avoid any risk of condensate being carried away.

Direct expansion heat exchangers are protected with vinyl coating.

- **Two (2) electronic expansion valves** combining increased optimisation of the heat exchangers and fast stabilisation of the thermodynamic system.
- **Anti-acid filter drier.**
- **H.P pressure switch.**
- **Liquid tank** with safety relief valve.
- **Suction accumulator.**
- **Leak detection:** The X- RCAM+ R290 MED is equipped with leak detection as standard. This device alerts the user in the event of a R290 refrigerant leak and automatically puts the unit into a safe mode.



Detailed components of the unit

Electrical assembly:

■ **Electric board** compliant with French standards NF EN C 15-100 and NF EN 60204-01, including:

- ✓ **A ETT PLC** with display.
- ✓ **A power switch** with lockable external handle for full load cut-off. Standard universal cable connection. Optional copper/aluminium junction boxes.
- ✓ A 400-230-24V **transformer** for control and regulation circuits.
- ✓ **Numbered terminal blocks** with disconnect terminals for all transfers or remote controls.
- ✓ **A terminal block** for compressor load shedding.
- ✓ **Internal wiring** fully numbered at both ends with numbered rings.
- ✓ An Ik3 **breaking capacity** of 10 kA basic.
- ✓ All components **protected** by circuit breakers.
- ✓ **A phase controller.**



Control assembly :

- **NTC-type temperature sensors** whose reliability and accuracy have been tested and validated both in the factory and on site.
- **One or more BEST** (Building Energy Saving Technology) **PLCs** developed specifically by ETT for this range of machines. Programmes are updated annually to add functions required in certain applications and to optimise machine power consumption as far as possible.
- **Native MODBUS IP** communication protocol (optional BacNet IP).

The microprocessor, memory and size of the PLCs are adapted to the application and the options selected, incorporating a factory-set programme of 160 possible configurations.

The PLC is housed in a plastic enclosure, which guarantees a high level of mechanical protection and reduces the risk of electrostatic discharges.

The PLC performs the following functions, among others:

- ✓ **On/off by remote contact** or vacancy contact
- ✓ **Occupancy/vacancy mode** according to programmed schedule (2 time slots per day).
- ✓ Heating curve control modulates supply air temperature based on outdoor air temperature.
- ✓ **Fault overview** with dry contact for transfer to customer system.
- ✓ **Management of safety devices** (anti-freeze thermostat, smoke detector, HP pressure switch, R290 sensor, mixing fan) and faults.
- ✓ **Measurement, indication and adjustment of the supply/extraction**

airflow rate, enabling precise control of airflow rates according to the machine's operating modes.

- ✓ **Fault history** in literal form (no code) with time and outdoor temperature display.
- ✓ **Recording of machine, compressor and auxiliaries operating times.**
- ✓ **Control of the machine's operating points**, whatever the external environment, enabling comfort to be managed for users, while considering the relationship between energy efficiency and the protection of the building.
- ✓ **Constant airflow control system:** The X-RCAM+ R290 MED maintains constant supply airflow via ETT filter fouling control equipment. Progressive SRV ETT refrigeration regulation ensures occupant comfort through precise supply air condition control. This configuration is recommended for hygienic fresh air handling applications requiring neutral temperature.
- ✓ **Variable airflow regulation** available via SCP/RPC sensors.
- ✓ **Auxiliary heating/cooling management** (hot water coil or chilled water coil options as selected).
- ✓ **Defrost control managed** in air-quality mode during 100% fresh-air operation.

The maintenance gateway (4G router + switch) provides essential features to ensure the performance, reliability, and scalability of your equipment:

- ▶ Provides a reliable and constant connection to the server
- ▶ Real-time monitoring in the event of faults or failures on critical systems
- ▶ Offers connected customer support that facilitates technical assistance through remote diagnostics, thereby limiting on-site interventions
- ▶ Prepares for the implementation of an Energy Performance Contract.
- ▶ Able to receive software updates incorporating the latest improvements from ETT in terms of regulation, energy performance, and comfort.
- ▶ Prepares for future developments related to artificial intelligence, such as predictive maintenance or data analysis

Main options

Frame - Casing

- Machine for outdoor installation
- Motorised external supply air damper (2006/42/EC Directive)
- Stainless steel frame 'METU'
- Multiblock *
- Blocking plate kit for multi-block transport

Acoustics

- STOPFLAM foam sound insulation for the technical compartment
- Acoustic insulation for fresh air cowl

Air handling

- Pressure gauge per filtration cell
- Filter Fouling Analogue Control (FFAC)
- Actuating smoke detector with battery back-up
- Opacimetric filters ISO ePM1 80% (F9) th. 48 mm on supply air
- Replacement filters
- SCP and RPC sensors

Thermal heat exchangers

- Hot water coil with analogue frost protection thermostat
- Chilled water coil
- Modulating 3-way valve mounted on the hot water coil or chilled water coil
- Pre-assembled shut-off valve + balancing valve

Installation

- Feet, aluminium, 200, 400 mm

Electrics and communication

- Machine Global Energy Meter
- Software licence for BacNet IP protocol
- IT regime compatibility Global Machine Energy Metering
- ETT 'Control Box' remote touch display
- TWIN regulation (see page 22)
- Additional years of subscription to myETTvision beyond the first year offered without commitment (4G gateway), provided the service is available in the relevant country
- Supply air constant pressure control (SCP with air flow rate variation ensuring constant supply air conditions)**

Reinforced protections

- Heresite coating on hot water coil or chilled water coil
- Heresite protection on thermodynamic coils
- High-performance plug fan with H2+S protective coating

* depending on model

** Contact factory for consultation on minimum operating airflow rates.

	DESCRIPTION	Unit	2-3000	2-4000
VENTILATION	SUPPLY AIR			
	Nominal supply and return airflow rates	m3/h	3,000	4,000
	Minimum/maximum air flow	m3/h	3,000 / 4,000	
	FANS ⁽¹⁾			
	Supply fan electrical power input	kW	0.9	1.4
	Exhaust fan electrical power input	kW	0.8	1.2
	ACOUSTICS ⁽¹⁾			
	Sound power level at supply air	dB(A)	80	85
AIR CONDITIONING PERFORMANCE	Outside sound power level	dB(A)	64	68
	Resulting external sound pressure at 10m ref. 10 ⁻⁵ in free field	dB(A)	33	37
	NOMINAL PERFORMANCE AT +35°C ^{(1) (2)}			
	Overall cooling capacity	kW	10.0	12.9
	Overall EER including fan power consumption	kW/kW	4.1	3.4
HEATING PERFORMANCE	Recovered cooling capacity via plate heat exchanger.	kW	6.1	8.3
	Plate heat exchanger efficiency	%	74	75
	NOMINAL PERFORMANCE AT +7°C ^{(1) (3)}			
	Overall heating capacity	kW	14.2	18.3
	Overall COP including fan power consumption	kW/kW	6.8	5.9
	Recovered cooling capacity via plate heat exchanger.	kW	9.8	13.3
	Plate heat exchanger efficiency	%	74	75
	NOMINAL PERFORMANCE AT -7°C ^{(1) (3)}			
	Overall heating capacity	kW	27.6	36.8
	Overall COP including fan power consumption	kW/kW	11.1	9.9
GENERAL DATA	Recovered cooling capacity via plate heat exchanger.	kW	21.7	29.5
	Plate heat exchanger efficiency	%	79	81
	ELECTRICAL DATA ⁽¹⁾			
	Total installed electrical power	kW	9.3	9.3
	Total installed electrical current	A	23	23
	Starting current	A	23	23
	REFRIGERATION CIRCUITS			
	Number of compressors	-	1	
	Type	-	Variable	
	OPERATING LIMITS			
	Maximum outside temperature	°C	45	
	Minimum outside temperature	°C	-15	
	WEIGHT ⁽¹⁾			
	Unit weight without any option	kg	660	

(1) Standard configuration for external static pressure of 250 Pa at supply, 250 Pa at exhaust, and filtration of ISO ePM10 50% (M5) + ISO ePM1 50% (F7) at supply and ISO ePM10 50% (M5) at exhaust without auxiliary.


(2) Indoor conditions: +27°C DB / +19°C WB - Outside conditions : +35°C DB / 24°C WB - Supply air conditions: +26°C

(3) Indoor conditions: +20°C DB / +12°C WB - Outside conditions : +7°C DB / +6°C WB - Outside conditions : -7°C DB / -8°C WB - Supply air conditions: +20°C


Dimensions and connections

X-RCAM+ R290 MED
2-3000 / 2-4000


Front view:

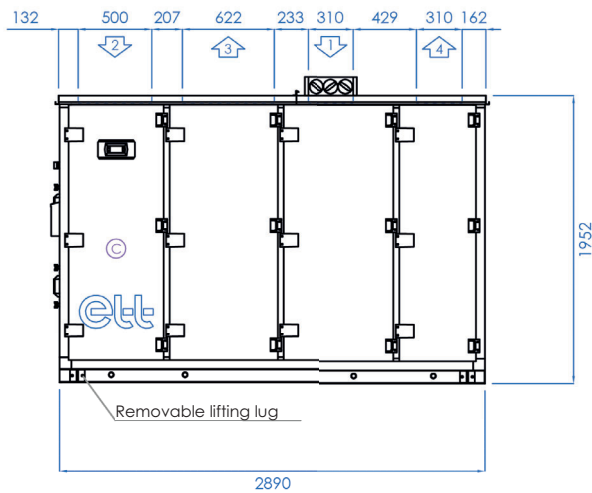


Top view:

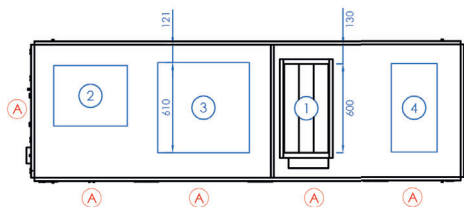

Side view (return):

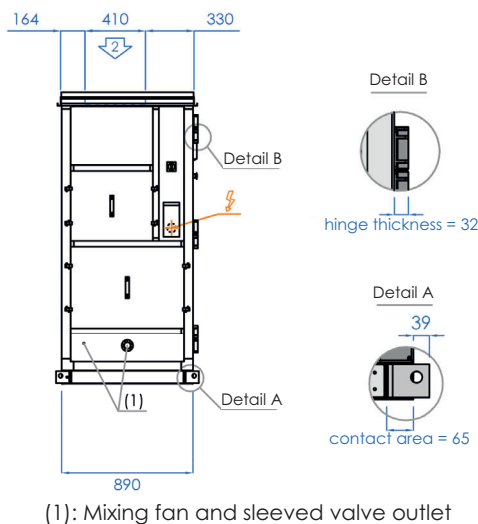

Side view (exhaust):

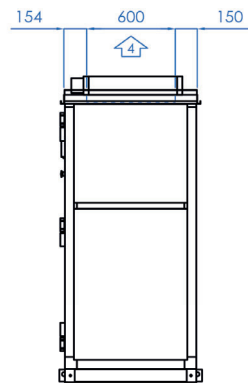

- ① Fresh air
- ② Return air
- ③ Supply air
- ④ Extracted air
- Ⓐ Access
- ⚡ Power supply
- Ⓒ Technical compartment

Dimensions of assembled casing (mm)

Overall dimensions for transport (mm)

Note:

- Allow for a minimum 200 mm support under the unit for connection of condensate traps.
- ETT recommends either a distance of 8 metres between fresh air intakes and exhaust air outlets, or the implementation of measures to ensure that 'contaminated' air cannot be recirculated.

Length Width Height

2,890 890 2,077

2,959 967 2,077

	DESCRIPTION	Unit	3-5000	3-6000
VENTILATION	SUPPLY AIR			
	Nominal supply and return airflow rates	m3/h	5,000	6,000
	Minimum/maximum air flow	m3/h	5,000/6,000	
	FANS ⁽¹⁾			
	Supply fan electrical power input	kW	1.4	2.0
	Exhaust fan electrical power input	kW	1.3	1.7
	ACOUSTICS ⁽¹⁾			
	Sound power level at supply air	dB(A)	81	85
AIR CONDITIONING PERFORMANCE	Outside sound power level	dB(A)	64	67
	Resulting external sound pressure at 10m ref. 10 ⁻⁵ in free field	dB(A)	33	37
	NOMINAL PERFORMANCE AT +35°C ^{(1) (2)}			
	Overall cooling capacity	kW	15.8	18.8
	Overall EER including fan power consumption	kW/kW	4.0	3.5
HEATING PERFORMANCE	Recovered cooling capacity via plate heat exchanger.	kW	10.2	12.5
	Plate heat exchanger efficiency	%	74	75
	NOMINAL PERFORMANCE AT +7°C ^{(1) (3)}			
	Overall heating capacity	kW	22.5	27.2
	Overall COP including fan power consumption	kW/kW	7.0	6.2
	Recovered cooling capacity via plate heat exchanger.	kW	16.4	19.8
	Plate heat exchanger efficiency	%	74	75
	NOMINAL PERFORMANCE AT -7°C ^{(1) (3)}			
	Overall heating capacity	kW	45.8	55.1
	Overall COP including fan power consumption	kW/kW	11.2	10.1
GENERAL DATA	Recovered cooling capacity via plate heat exchanger.	kW	36.4	44.1
	Plate heat exchanger efficiency	%	80	81
	ELECTRICAL DATA ⁽¹⁾			
	Total installed electrical power	kW	10.5	10.5
	Total installed electrical current	A	27	27
	Starting current	A	27	27
	REFRIGERATION CIRCUITS			
	Number of compressors	-	1	
	Type	-	Variable	
	OPERATING LIMITS			
	Maximum outside temperature	°C	45	
	Minimum outside temperature	°C	-15	
	WEIGHT ⁽¹⁾			
	Unit weight without any option	kg	960	


(1) Standard configuration for external static pressure of 250 Pa at supply, 250 Pa at exhaust, and filtration of ISO ePM10 50% (M5) + ISO ePM1 50% (F7) at supply and ISO ePM10 50% (M5) at exhaust without auxiliary.

(2) Indoor conditions: +27°C DB / +19°C WB - Outside conditions : +35°C DB /


24°C WB - Supply air conditions: +26°C

(3) Indoor conditions: +20°C DB / +12°C WB - Outside conditions : +7°C DB / +6°C WB - Outside conditions : -7°C DB / -8°C WB - Supply air conditions: +20°C


Front view:

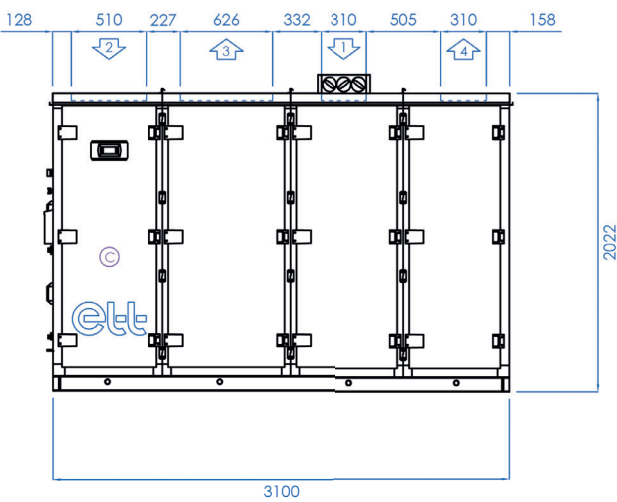


Top view:

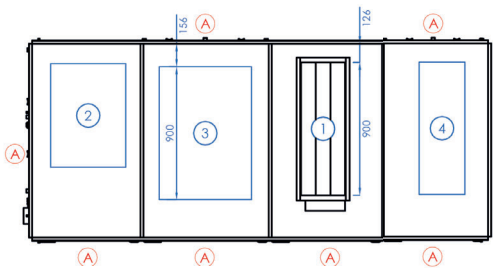

Side view (return):

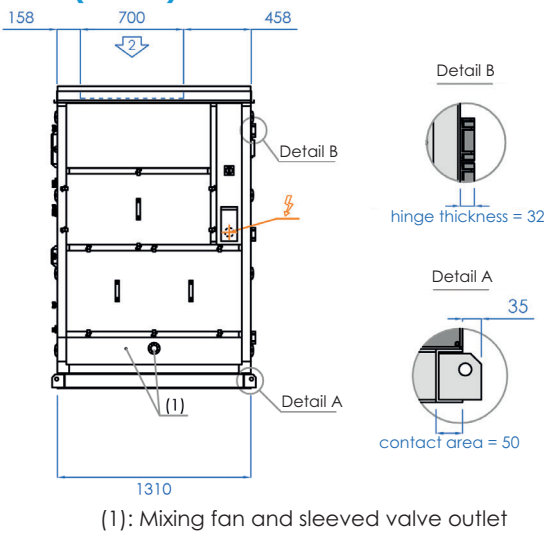

Side view (exhaust):

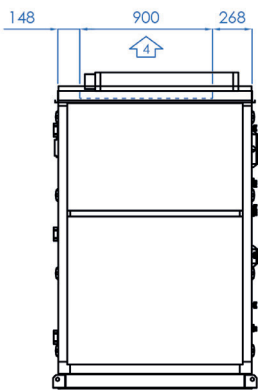

- ① Fresh air
- ② Return air
- ③ Supply air
- ④ Extracted air
- Ⓐ Access
- ⚡ Power supply
- Ⓒ Technical compartment

Dimensions of assembled casing (mm)

Overall dimensions for transport (mm)

Length	Width	Height
3,100	1,310	2,147

3,163	1,385	2,147
-------	-------	-------

Note: - Allow for a minimum 200 mm support under the unit for connection of condensate traps.
- ETT recommends either a distance of 8 metres between fresh air intakes and exhaust air outlets, or the implementation of measures to ensure that 'contaminated' air cannot be recirculated.

	DESCRIPTION	Unit	4-7000	4-8000	4-9000	4-10000
VENTILATION	SUPPLY AIR					
	Nominal supply and return airflow rates	m3/h	7,000	8,000	9,000	10,000
	Minimum/maximum air flow	m3/h	7,000/10,000			
	FANS ⁽¹⁾					
	Supply fan electrical power input	kW	2.0	2.5	3.1	3.9
	Exhaust fan electrical power input	kW	1.7	2.1	2.6	3.2
	ACOUSTICS ⁽¹⁾					
	Sound power level at supply air	dB(A)	84	87	89	91
AIR CONDITIONING PERFORMANCE	Outside sound power level	dB(A)	67	69	72	74
	Resulting external sound pressure at 10m ref. 10 ⁻⁵ in free field	dB(A)	36	38	41	43
	NOMINAL PERFORMANCE AT +35°C ^{(1) (2)}					
	Overall cooling capacity	kW	22.7	26.0	29.2	32.2
	Overall EER including fan power consumption	kW/kW	4.3	3.9	3.5	3.1
HEATING PERFORMANCE	Recovered cooling capacity via plate heat exchanger.	kW	14.3	16.4	18.6	21.8
	Plate heat exchanger efficiency	%	74	74	75	75
	NOMINAL PERFORMANCE AT +7°C ^{(1) (3)}					
	Overall heating capacity	kW	33.5	37.6	41.7	46.0
	Overall COP including fan power consumption	kW/kW	7.2	6.8	6.2	5.6
	Recovered cooling capacity via plate heat exchanger.	kW	22.9	26.5	29.8	33.3
	Plate heat exchanger efficiency	%	74	75	75	75
	NOMINAL PERFORMANCE AT -7°C ^{(1) (3)}					
	Overall heating capacity	kW	64.5	74.1	83.3	92.8
	Overall COP including fan power consumption	kW/kW	11.6	11.0	10.2	9.4
GENERAL DATA	Recovered cooling capacity via plate heat exchanger.	kW	51.7	58.9	66.3	73.9
	Plate heat exchanger efficiency	%	80	81	81	81
	ELECTRICAL DATA ⁽¹⁾					
	Total installed electrical power	kW	22.8	22.8	22.8	22.8
	Total installed electrical current	A	35	35	35	35
	Starting current	A	35	35	35	35
	REFRIGERATION CIRCUITS					
	Number of compressors	-	1			
	Type	-	Variable			
	OPERATING LIMITS					
	Maximum outside temperature	°C	45			
	Minimum outside temperature	°C	-15			
	WEIGHT ⁽¹⁾					
	Unit weight without any option	kg	1,280			

(1) Standard configuration for external static pressure of 250 Pa at supply, 250 Pa at exhaust, and filtration of ISO ePM10 50% (M5) + ISO ePM1 50% (F7) at supply and ISO ePM10 50% (M5) at exhaust without auxiliary.

(2) Indoor conditions: +27°C DB / +19°C WB - Outside conditions : +35°C DB /


24°C WB - Supply air conditions: +26°C

(3) Indoor conditions: +20°C DB / +12°C WB - Outside conditions : +7°C DB / +6°C WB - Outside conditions : -7°C DB / -8°C WB - Supply air conditions: +20°C


Dimensions and connections

X-RCAM+ R290 MED
4-7000 / 4-8000 / 4-9000 / 4-10000


Front view:

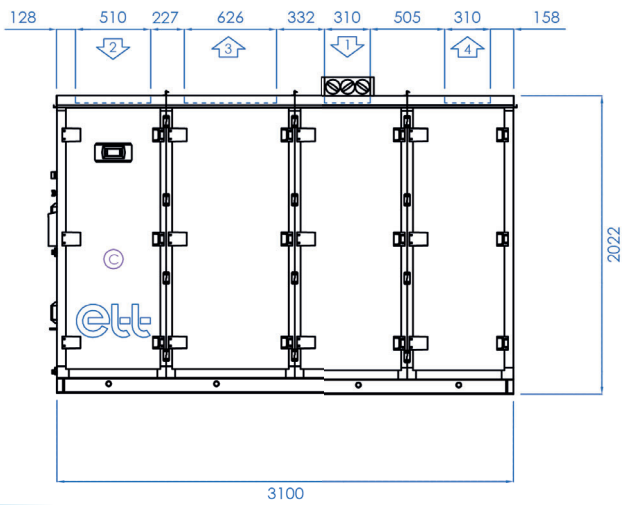


Top view:

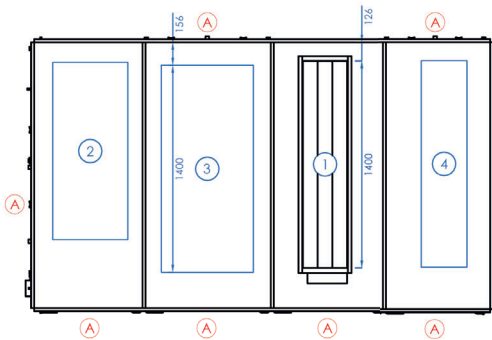

Side view (return):

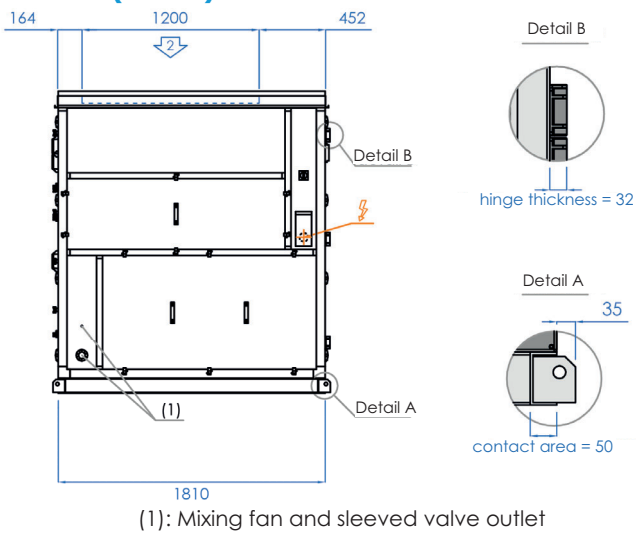

Side view (exhaust):

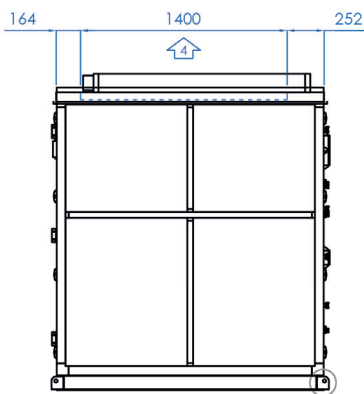

- ① Fresh air
- ② Return air
- ③ Supply air
- ④ Extracted air
- Ⓐ Access
- ⚡ Power supply
- Ⓒ Technical compartment

Dimensions of assembled casing (mm)

Overall dimensions for transport (mm)

Length	Width	Height
3,100	1,810	2,147
3,163	1,885	2,147

Note:

- Allow for a minimum 200 mm support under the unit for connection of condensate traps.
- ETT recommends either a distance of 8 metres between fresh air intakes and exhaust air outlets, or the implementation of measures to ensure that 'contaminated' air cannot be recirculated.

	DESCRIPTION	Unit	5-11000	5-12000	5-13000	5-14000	5-15000
VENTILATION	SUPPLY AIR						
	Nominal air flow	m3/h	11,000	12,000	13,000	14,000	15,000
	Minimum/maximum air flow	m3/h	11,000/15,000				
	FANS ⁽¹⁾						
	Supply fan electrical power input	kW	3.2	3.8	4.0	4.8	5.7
	Exhaust fan electrical power input	kW	2.7	3.2	3.2	3.8	4.5
	ACOUSTICS ⁽¹⁾						
	Sound power level at supply air	dB(A)	85	87	87	88	90
	Outside sound power level	dB(A)	68	70	70	72	73
	Resulting external sound pressure at 10m ref. 10-5 in free field	dB(A)	37	39	39	41	42
AIR CONDITIONING PERFORMANCE	NOMINAL PERFORMANCE AT +35°C ^{(1) (2)}						
	Overall cooling capacity	kW	36.5	40.0	43.4	46.1	48.8
	Overall EER including fan power consumption	kW/kW	4.1	3.8	3.7	3.4	3.1
	Recovered cooling capacity via plate heat exchanger.	kW	22.5	24.8	26.9	29.1	31.2
	Plate heat exchanger efficiency	%	74	75	75	75	75
HEATING PERFORMANCE	NOMINAL PERFORMANCE AT +7°C ^{(1) (2)}						
	Overall heating capacity	kW	51.0	55.4	59.0	63.2	67.6
	Overall COP including fan power consumption	kW/kW	7.1	6.7	6.8	6.3	5.8
	Recovered heating capacity via plate heat exchanger.	kW	36.0	39.8	43.1	46.5	49.9
	Plate heat exchanger efficiency	%	74	75	75	75	75
	NOMINAL PERFORMANCE AT -7°C ^{(1) (2)}						
	Overall heating capacity	kW	99.9	109.5	118.6	128.2	137.9
	Overall COP including fan power consumption	kW/kW	11.3	10.8	11.0	10.3	9.6
	Recovered heating capacity via plate heat exchanger.	kW	80.2	88.1	95.8	103.4	110.9
	Plate heat exchanger efficiency	%	80	81	81	81	81
GENERAL DATA	ELECTRICAL DATA ⁽¹⁾						
	Total installed electrical power	kW	24.2	24.2	28.4	28.4	28.4
	Total installed electrical current	A	37	37	44	44	44
	Starting current	A	37	37	44	44	44
	REFRIGERATION CIRCUITS						
	Number of Compressors	-	1				
	Type	-	Variable				
	OPERATING LIMITS						
	Maximum outside temperature	°C	45				
	Minimum outside temperature	°C	-15				
	WEIGHT ⁽¹⁾						
	Unit weight without any option	kg	1,580				

(1) Standard configuration for external static pressure of 250 Pa at supply, 250 Pa at exhaust, and filtration of ISO ePM10 50% (M5) + ISO ePM1 50% (F7) at supply and ISO ePM10 50% (M5) at exhaust without auxiliary.

(2) Indoor conditions: +27°C DB / +19°C WB - Outside conditions : +35°C DB /

24°C WB - Supply air conditions: +26°C


(3) Indoor conditions: +20°C DB / +12°C WB - Outside conditions : +7°C DB / +6°C WB - Outside conditions : -7°C DB / -8°C WB - Supply air conditions: +20°C

Dimensions and connections


X-RCAM+ R290 MED

5-11000 / 5-12000 / 5-13000 / 5-14000 / 5-15000


Front view:

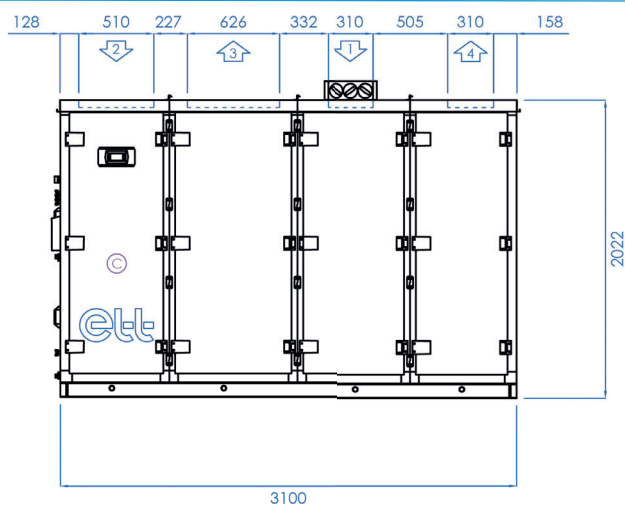


Top view:

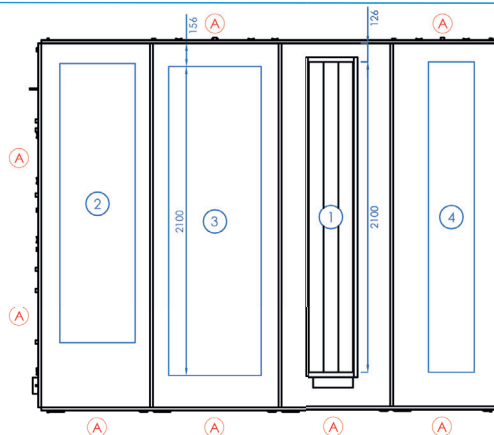

Side view (return):

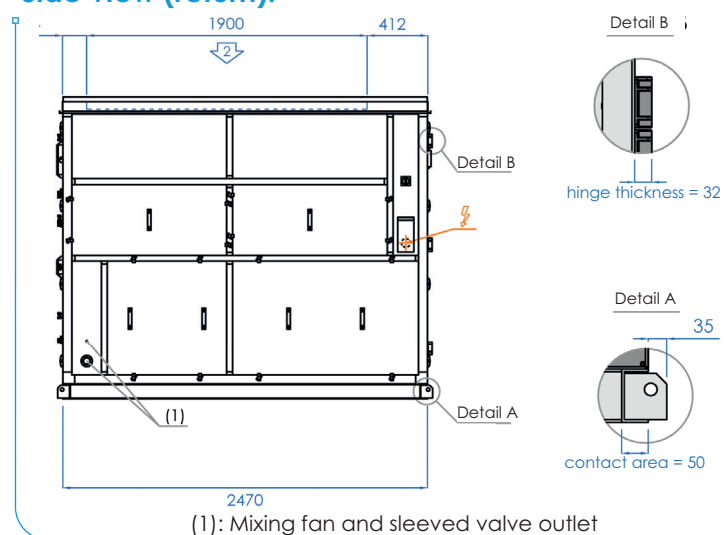

Side view (exhaust):

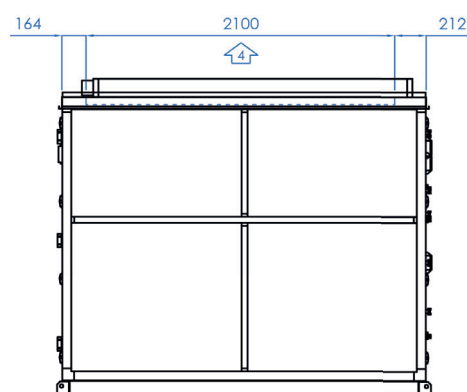


- ① Fresh air
- ② Return air
- ③ Supply air
- ④ Extracted air
- Ⓐ Access
- ⚡ Power supply
- Ⓒ Technical compartment

	Length	Width	Height
Dimensions of assembled casing (mm)	3,100	2,470	2,147
Overall dimensions for transport (mm)	3,163	2,545	2,147


Note: - Allow for a minimum 200 mm support under the unit for connection of condensate traps.
- ETT recommends either a distance of 8 metres between fresh air intakes and exhaust air outlets, or the implementation of measures to ensure that 'contaminated' air cannot be recirculated.

Air handling layouts

ARRANGEMENT A

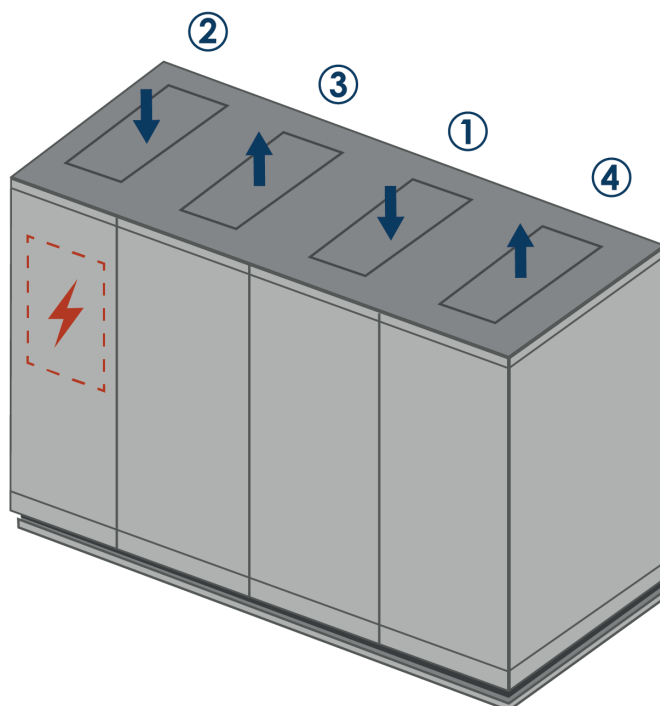

ARRANGEMENT B

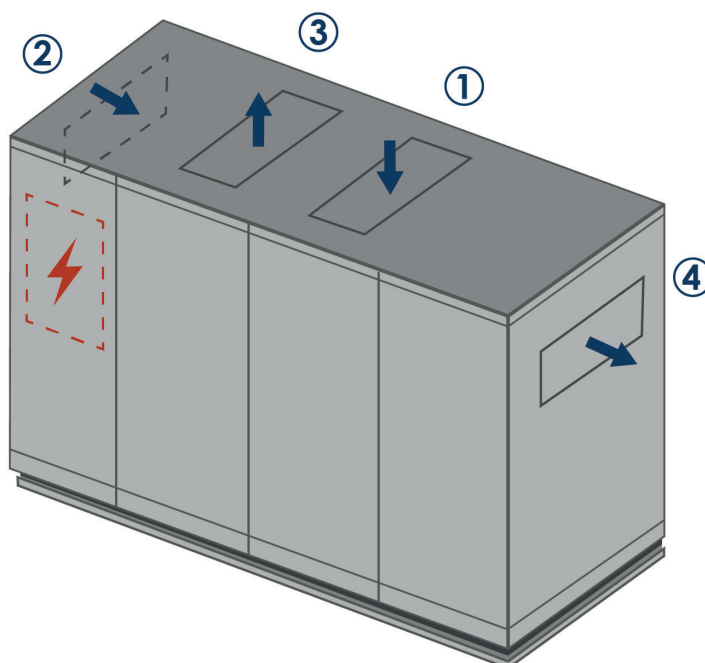

① Fresh air ② Return air ③ Supply air ④ Exhaust air

TWIN regulation option


The X-RCAM+ R290 MED units can be interconnected.

This process allows for:

- ✓ **Double** the treated airflow rates
- ✓ **Adaptable** to site-specific installation **constraints**.


The machines can be positioned back-to-back or separately.

The operation of the machines is controlled through the installation of a master PLC.

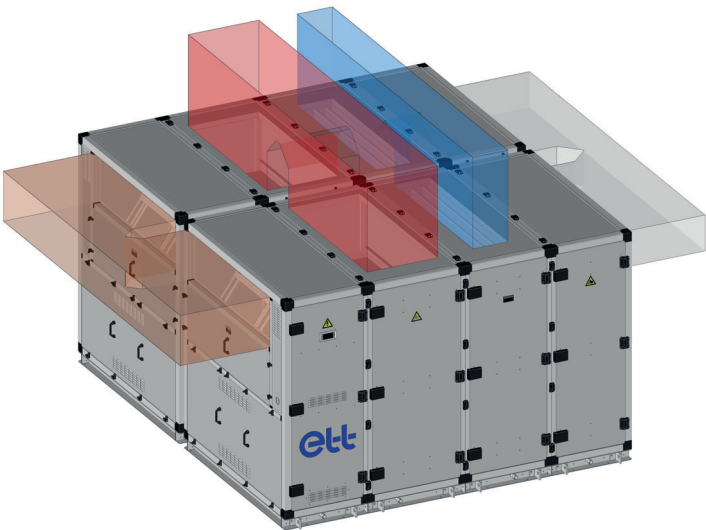

Multi-block option


The X-RCAM+ R290 MED can be supplied in multi-block configurations for casing sizes 3, 4 and 5, to facilitate installation in confined technical rooms.

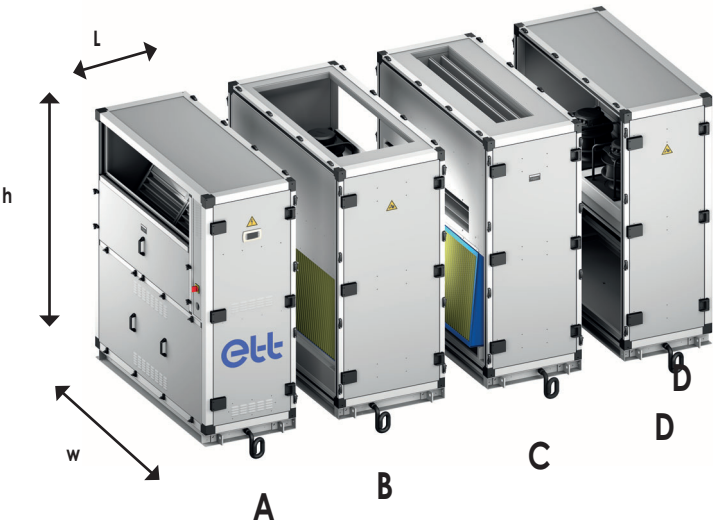

Block	Unit	Length (L)			Width (W)	Height (h)
		T3	T4	T5	T3/T4/T5	
A	mm	1,389	1,889	2,549	780	2,040
B					870	
C					838	
D					743	

Auxiliaries: Hot water coils

Piping diagram

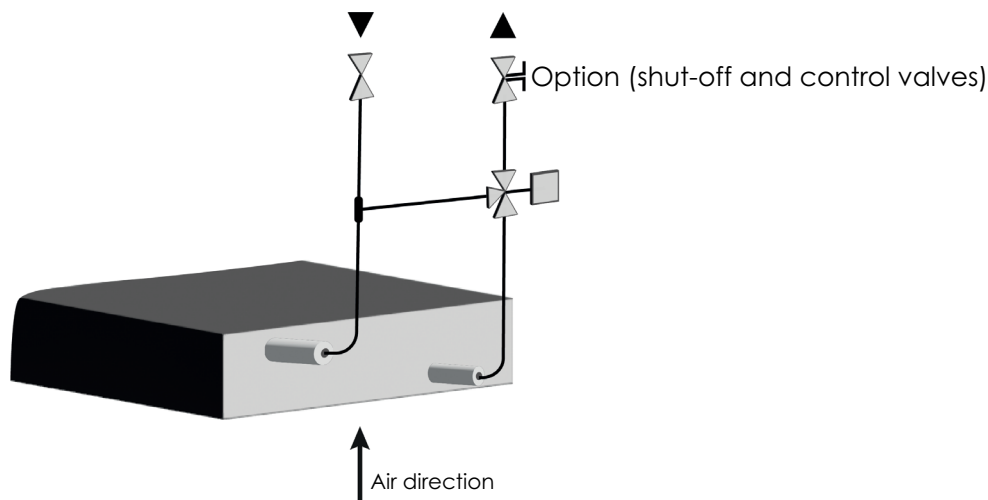

Hot water coil auxiliary heater is integrated into the X-RCAM+ R290 MED casing, located beneath the supply air plenum.

CONNECTIONS AND WEIGHTS

	Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
Customer connection diameter	mm	15x21		20x27		26x34				33x42				
Coil weight + 3WV with water	kg	9		12		17				24				

POWER RATINGS


		Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
Water regime 90/70	Max. power	kW	13.1	15.6	21.8	24.4	31.4	34.1	36.7	39.1	46.7	49.2	51.7	54.1	56.4
	Max. flow rate	m³/h	0.6	0.7	1.0	1.1	1.4	1.5	1.6	1.7	2.1	2.2	2.3	2.4	2.5
	Coil + 3WV pressure drop	mWC	1.6	2.2	3.0	3.7	2.5	2.8	3.2	3.5	1.0	1.1	1.2	1.4	1.4
Water regime 80/60	Max. power	kW	10.9	13.0	18.1	20.3	26.2	28.4	30.6	32.6	38.6	40.8	42.8	44.8	46.7
	Max. flow rate	m³/h	0.5	0.6	0.8	0.9	1.2	1.3	1.4	1.4	1.7	1.8	1.9	2.0	2.1
	Coil + 3WV pressure drop	mWC	1.5	1.6	2.5	2.6	1.9	2.1	2.5	2.8	1.0	1.1	0.9	1.0	1.0

OPTIONAL: SHUT-OFF VALVE ON FLOW AND TA BALANCING VALVE ON RETURN

		Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
Water regime 90/70	Pressure drop: Shut-off valve and TA valve, 3-turn opening	mWC	0.3	0.4	0.2	0.3	0.4	0.5	0.6	0.6	0.4	0.5	0.5	0.6	0.7
Water regime 80/60		mWC	0.2	0.3	0.2	0.2	0.3	0.4	0.4	0.5	0.3	0.3	0.4	0.4	0.4

Auxiliary: Chilled water coils

Piping diagram

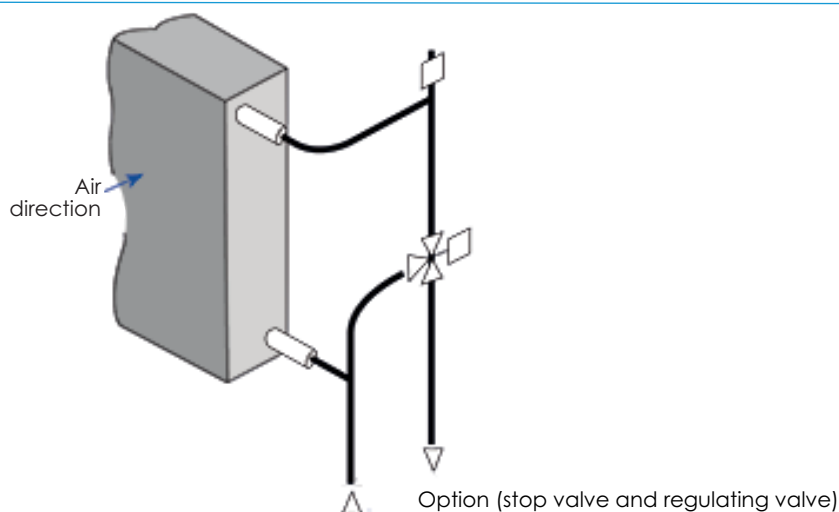

Chilled water coil auxiliary cooler for the X-RCAM+ R290 MED is shipped separately for duct mounting.

CONNECTIONS AND WEIGHTS

	Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
Customer connection diameter	mm	15x21		20x27		26x34				33x42				
Coil weight + 3WV with water	kg	9		12		17				24				

CAPACITIES AND PRESSURE DROPS FOR 29°C SUPPLY AIR TEMPERATURE AND FULL-LOAD COOLING CAPACITY AT 40°C OUTDOOR


		Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
07/12 °C water regime	Max. power	kW	5.3	6.3	8.9	10.0	12.9	14.0	15.0	16.0	18.6	19.6	20.6	21.5	22.1
	Max. flow rate	m³/h	0.9	1.1	1.5	1.7	2.2	2.4	2.6	2.7	3.2	3.4	3.5	3.7	3.9
	Pressure drop: 3-Way Valve + coil	mWC	4.2	5.7	7.7	9.5	6.3	7.4	8.4	9.2	2.3	2.6	2.8	3.1	3.3

OPTIONAL: SHUT-OFF VALVE ON FLOW AND TA BALANCING VALVE ON RETURN

		Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
07/12 °C water regime	Pressure drop: Shut-off valve and TA valve, 3-turn opening	mWC	0.6	0.9	0.6	0.7	1.1	1.3	1.5	1.7	1.1	1.2	1.3	1.4	1.6

Connections: Hot water coil

Block diagram - Front view

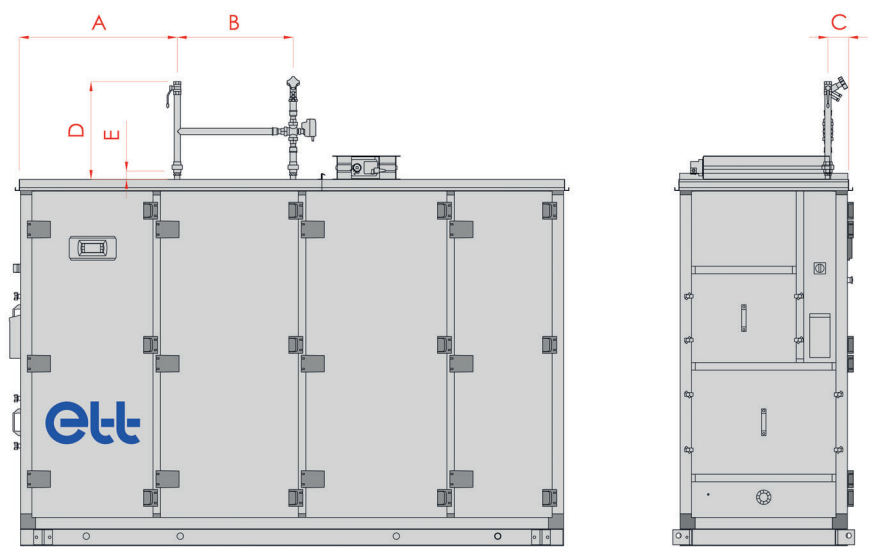

Connection interface: "Hot water coil auxiliary"

DIMENSIONS

	Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-8000	4-9000	4-10000	5-11000	5-12000	5-13000	5-14000	5-15000
A	mm	834	834	866	866	866	866	866	866	866	866	866	866	866
B	mm	617	617	617	617	617	617	617	617	617	617	617	617	617
C	mm	103	103	129	129	129	129	129	129	129	129	129	129	129
D	mm	475	475	557	557	665	665	665	665	648	648	648	648	648
E	mm	46	46	41	41	41	41	41	41	41	41	41	41	41

Sound level* supply air/exhaust air

Spectrum by frequency band

X-RCAM+ R290 MED

At unit supply air

Available pressure: 250 Pa at supply air, 250 Pa at exhaust

	FREQUENCY BANDS Hz ►		63	125	250	500	1000	2000	4000	8000	Overall sound level Lw (dB(A))
	Supply air flow rate (m³/h) ▼	Processed air flow rate (m³/h) ▼									
2-3000	3,000	3,000	47	54	65	70	75	75	70	61	80
2-4000	4,000	4,000	51	58	69	74	80	80	76	69	85
3-5000	5,000	5,000	51	59	68	74	77	75	71	67	81
3-6000	6,000	6,000	53	62	71	77	80	79	75	72	85
4-7000	7,000	7,000	52	58	68	74	80	80	75	67	84
4-8000	8,000	8,000	54	60	71	76	82	82	78	71	87
4-9000	9,000	9,000	56	61	73	78	84	84	81	74	89
4-10000	10,000	10,000	52	63	75	80	87	87	84	78	91
5-11000	11,000	11,000	55	63	72	78	81	80	75	72	85
5-12000	12,000	12,000	56	64	73	80	83	82	77	75	87
5-13000	13,000	13,000	53	64	70	78	82	82	79	71	87
5-14000	14,000	14,000	53	66	72	79	83	84	81	73	88
5-15000	15,000	15,000	54	67	73	80	84	86	82	75	90

On exhaust air side

Available pressure: 250 Pa at supply air, 250 Pa at exhaust

	FREQUENCY BANDS Hz ►		63	125	250	500	1000	2000	4000	8000	Overall sound level Lw (dB(A))
	Supply air flow rate (m³/h) ▼	Processed air flow rate (m³/h) ▼									
2-3000	3,000	3,000	45	53	63	67	73	73	68	58	78
2-4000	4,000	4,000	50	56	67	72	78	78	74	66	82
3-5000	5,000	5,000	49	57	66	72	75	74	68	64	79
3-6000	6,000	6,000	52	60	69	75	78	77	73	70	83
4-7000	7,000	7,000	50	56	66	71	78	78	73	64	82
4-8000	8,000	8,000	52	58	69	74	80	80	76	68	84
4-9000	9,000	9,000	49	59	71	76	82	82	79	71	87
4-10000	10,000	10,000	50	61	73	78	84	84	81	75	89
5-11000	11,000	11,000	53	61	70	76	79	78	73	70	84
5-12000	12,000	12,000	55	63	72	78	81	80	75	73	85
5-13000	13,000	13,000	51	62	68	75	80	79	77	68	84
5-14000	14,000	14,000	51	64	69	76	81	81	79	70	86
5-15000	15,000	15,000	52	65	71	77	82	82	80	73	87

*Lw: sound power level (dB(A))

Sound level* fresh air intake/return air

Spectrum by frequency band

X-RCAM+ R290 MED

At unit fresh air intake

Available pressure: 250 Pa at supply air, 250 Pa at exhaust

	FREQUENCY BANDS Hz ►		63	125	250	500	1000	2000	4000	8000	Overall sound level Lw (dB(A))
	Supply air flow rate (m³/h) ▼	Processed air flow rate (m³/h) ▼									
2-3000	3,000	3,000	37	44	53	56	52	49	43	34	59
2-4000	4,000	4,000	40	48	58	60	57	54	50	42	64
3-5000	5,000	5,000	43	47	57	59	55	51	47	42	63
3-6000	6,000	6,000	46	50	60	62	58	55	51	48	66
4-7000	7,000	7,000	41	48	57	60	56	54	49	40	64
4-8000	8,000	8,000	42	50	60	62	59	56	52	44	66
4-9000	9,000	9,000	44	51	62	65	61	59	56	48	69
4-10000	10,000	10,000	45	53	64	67	63	61	59	52	71
5-11000	11,000	11,000	48	51	61	63	59	55	51	48	67
5-12000	12,000	12,000	49	53	63	65	61	57	53	51	69
5-13000	13,000	13,000	46	52	59	59	60	57	56	43	66
5-14000	14,000	14,000	47	53	60	60	61	58	58	45	67
5-15000	15,000	15,000	47	54	62	62	62	60	60	48	68

On return air side


Available pressure: 250 Pa at supply air, 250 Pa at exhaust

	FREQUENCY BANDS Hz ►		63	125	250	500	1000	2000	4000	8000	Overall sound level Lw (dB(A))
	Supply air flow rate (m³/h) ▼	Processed air flow rate (m³/h) ▼									
2-3000	3,000	3,000	35	43	52	55	51	48	43	34	58
2-4000	4,000	4,000	39	47	57	59	56	53	49	43	63
3-5000	5,000	5,000	42	47	56	58	54	51	46	43	62
3-6000	6,000	6,000	45	50	59	62	57	54	50	50	65
4-7000	7,000	7,000	39	47	56	59	56	53	48	41	63
4-8000	8,000	8,000	40	49	58	61	58	56	52	45	65
4-9000	9,000	9,000	42	51	61	64	60	58	55	49	68
4-10000	10,000	10,000	43	52	63	66	62	60	58	53	70
5-11000	11,000	11,000	46	51	60	63	58	55	51	50	66
5-12000	12,000	12,000	47	53	62	64	60	57	53	53	68
5-13000	13,000	13,000	44	51	57	58	59	57	56	44	65
5-14000	14,000	14,000	45	53	59	59	60	58	58	46	66
5-15000	15,000	15,000	45	54	60	60	61	59	59	49	67

*Lw: sound power level (dB(A))

Accessories for installation : Feet




Fixed aluminium foot
Unit weight: 1 kg

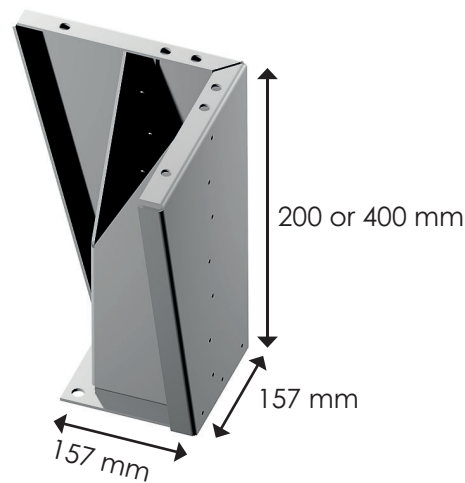

All X-RCAM+ R290 MED units require support feet.

Unit	2-3000	2-4000	3-5000	3-6000	4-7000	4-9000	5-11000	5-13000	5-15000
Number of feet (Packaged units)	4	4	4	4	6	6	6	6	6
Number of feet (Multiblock units)	-	-	16	16	16	16	16	16	16





Reference: **MARK-BRO_73-EN_B**

ETT - Route de Brest - BP26
29830 Ploudalmézeau - France
Tel.: +33 298 481 422
Export Contact: +33 298 984 870
ETT Services : +33 298 984 822

www.ett-hvac.com